


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 27 TOWNSHIP 17 RANGE 5
DATE: 2-11-99 -- 8-16-04
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County 11-7-94

IN. S.P.C. E ZONE, NAD 83
NAME: 17052702
N: 516291.8490(m)
E: 75974.2780(m)

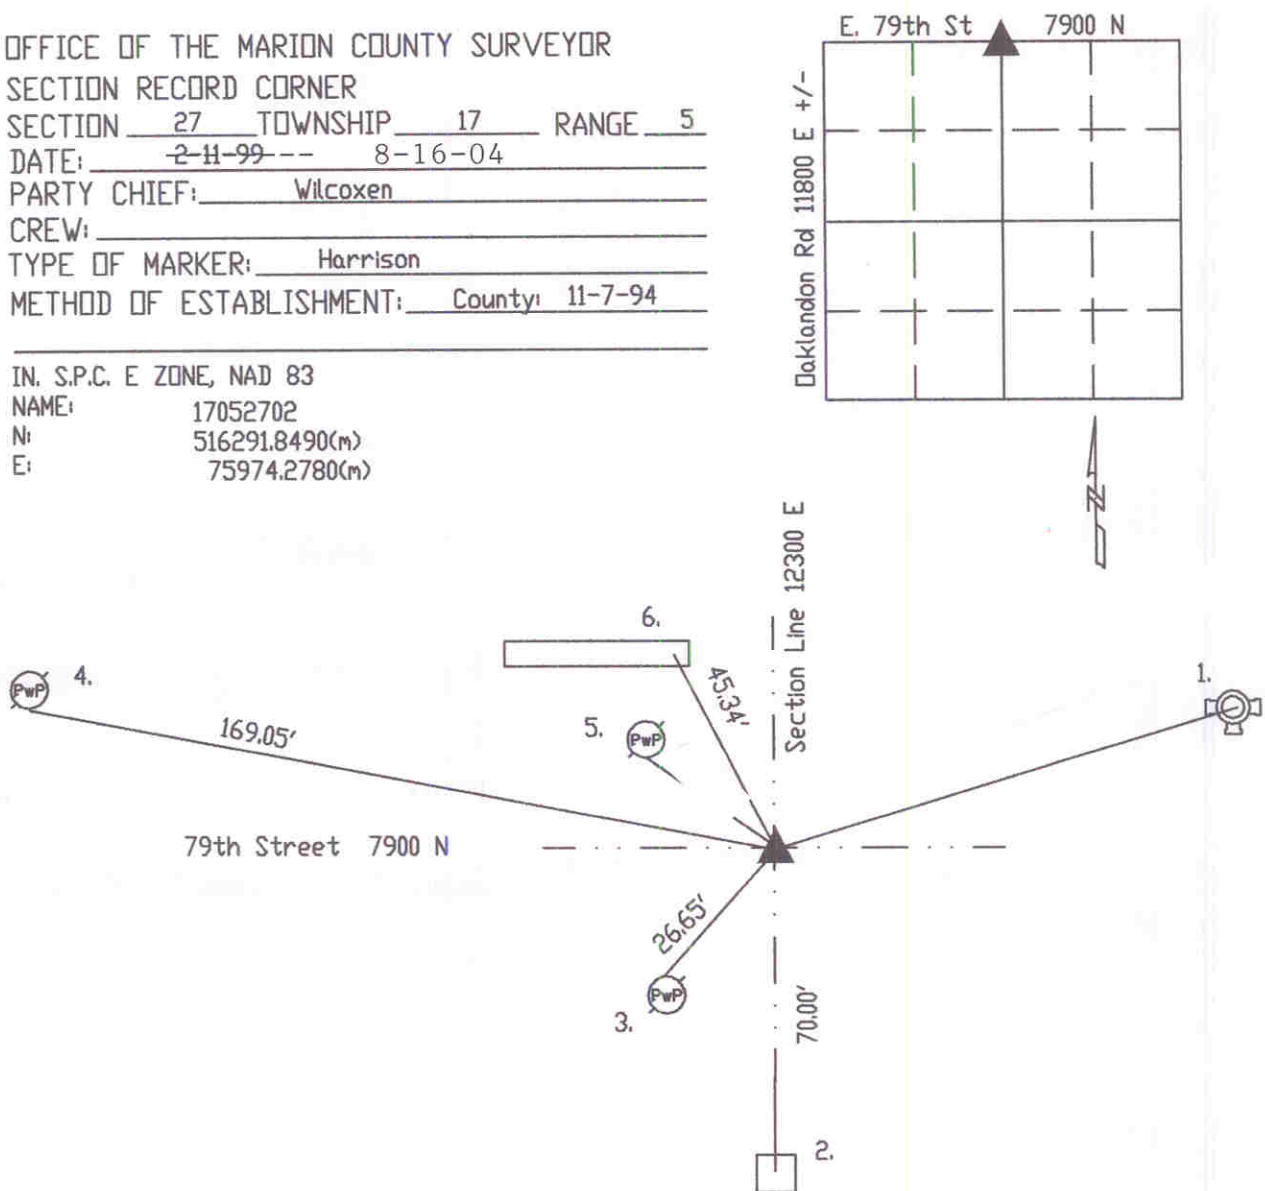

Original post set 1821 by Laughlin with witnesses: 18" beech S 75 W 19 links, 7" beech N 44 W 22 links per Marion County Atlas pg. 16. Legal by Hosbrook 2-1849 per Lawrence Township Legal Survey Book pg. 15 called corner 'c'. Duplicate survey pg. 36. 10-9-52 Catheart called for stone at corner. 5-27-70 McLand called stone found 10" down. Cripe Job # 7426 called stone. Schneider Job # 16392 called PK nail found at corner. 4-28-75 Fortner called PK nail at surface. Excavated 7-23-82 by Cleveland MCS found PK nail at surface found over high point of stone. Stone found 1 foot down. Stone removed and Harrison set. Re-tied 2-11-99 by Wilcoxen.

HC752702

REF.	DISTANCE	DESCRIPTION
1.	110.40'	Top nut of fire hydrant
2.	70.00'	Due S to 4' x 4' sub-monument
3.	26.65'	PK nail NW PwP#248-251GB 8'up
4.	169.05'	PK nail S PwP#15-251GA 10'up
5.	32.45'	PwP#16-251GA 12'up (Mag nail w/bw NE 6"up)
6.	45.34'	Cut 'x' E-end sidewalk